


Perfera W FTXM

Nástenná klimatizácia



Vlastnosti a funkcie

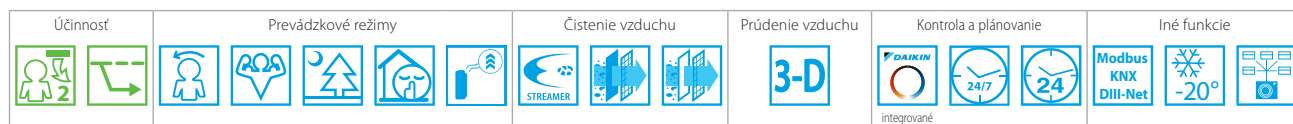

| Údaje o účinnosti | | FTXM + RXM | CTXM15R | 20R + 20R9 | 25R + 25R9 | 35R + 35R9 | 42R + 42R | 50R + 50R | 60R + 60R | 71R + 71R | |
|--|-------------------------------|----------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|--|
| Chladiaci výkon | Min./Nom./Max. | kW | | 1,3/2,0/2,6 | 1,3/2,5/3,2 | 1,4/3,4/4,0 | 1,7/4,2/5,0 | 1,7/5,0/6,0 | 1,7/6,0/7,0 | 2,3/7,1/8,5 | |
| Vykurovací výkon | Min./Nom./Max. | kW | | 1,3/2,5/3,5 | 1,3/2,8/4,7 | 1,4/4,0/5,2 | 1,7/5,4/6,0 | 1,7/5,8/7,7 | 1,7/7,0/8,0 | 2,3/8,2/10,2 | |
| Príkon | Chladienie | Min./Nom./Max. | kW | 0,44 | 0,56 | 0,80 | 0,97 | 1,36 | 1,77 | 2,34 | |
| | Vykurovanie | Min./Nom./Max. | | 0,50 | 0,56 | 0,99 | 1,31 | 1,45 | 1,94 | 2,57 | |
| Chladienie priestoru | Trieda energetickej účinnosti | Kompatibilné | | A+++ | | A++ | | A+ | | A | |
| | Výkon | Pdesign | kW | 2,00 | 2,50 | 3,40 | 4,20 | 5,00 | 6,00 | 7,10 | |
| | SEER | | | | 8,65 | | 7,85 | 7,41 | 6,90 | 6,20 | |
| Ročná spotreba energie | | kWh/a | | 81 | 101 | 137 | 187 | 236 | 304 | 401 | |
| Vykurovanie priestoru (Priemerné podnebie) | Trieda energetickej účinnosti | Kompatibilné | | A+++ | | A++ | | A+ | | A | |
| | Výkon | Pdesign | kW | 2,30 | 2,40 | 2,50 | 4,00 | 4,60 | 4,80 | 6,20 | |
| | SCOP/A | | | | 5,10 | | 4,71 | 4,30 | 4,10 | | |
| Ročná spotreba energie | | kWh/a | | 631 | 659 | 686 | 1.189 | 1.368 | 1.562 | 2.117 | |

| Vnútrotná jednotka | | FTXM | CTXM15R | 20R | 25R | 35R | 42R | 50R | 60R | 71R | | | | | | | |
|---------------------------|-------------|----------------------------|---------|-------------|-----|-------------|-----|-------------|-------------|-------------|--|-------------|--|-------------|--|-------------|--|
| Rozmery | Jednotka | VýškaxŠírkaxHĺbka | mm | 295x778x272 | | | | | 299x998x292 | | | | | | | | |
| Vzduchový filter | Typ | Odnímateľné/umývateľné | | | | | | | | | | | | | | | |
| Hladina akustického tlaku | Chladienie | Tichá/nízka/Stredná/vysoká | dBA | 19/25/33/41 | | 19/29/33/45 | | 21/30/39/45 | | 27/36/40/44 | | 30/37/42/46 | | 32/38/43/47 | | | |
| | Vykurovanie | Tichá/nízka/Stredná/vysoká | dBA | 20/26/34/39 | | 20/27/34/39 | | 20/28/35/39 | | 21/29/39/45 | | 31/34/39/43 | | 33/36/41/45 | | 34/37/42/46 | |

| Vonkajšia jednotka | | RXM | 20R9 | 25R9 | 35R9 | 42R | 50R | 60R | 71R | |
|---------------------------|-------------------------------------|-----------------------------|--------------------|------|---------|-----------------------|-------------|-----------------------|----------|--|
| Rozmery | Jednotka | VýškaxŠírkaxHĺbka | 552x840x350 | | | | 734x954x401 | | | |
| Hladina akustického tlaku | Chladienie | Vysoká | 46 | | 49 | | 48 | | 47 | |
| | Vykurovanie | Vysoká | 47 | | 49 | | 48 | | 49 | |
| Prevádzkový rozsah | Chladienie | Okolité | Min.~Max. | | °CDB | | -10~50°C | | -10~46°C | |
| | Vykurovanie | Okolité | Min.~Max. | | °CDB | | -20~24°C | | | |
| Chladivo | Typ / GWP / Náplň | kg / TCO _{Eq} | R-32/675/0,76/0,52 | | | R-32/675/0,1,10/0,750 | | R-32/675/0,1,15/0,780 | | |
| Pripojenia potrubia | Dĺžka potrubia | Vonk.j. - vnút.j. | Max. | | m | | 20 | | 30 | |
| | | Systém | Bez náplne | | m | | 10 | | | |
| | | Rozdiel v úrovniach vonk.j. | Max. | | m | | 15 | | 20 | |
| Napájanie | Fáza / Maximálny prúd poistky (MFA) | A | 1~ / 10 | | 1~ / 13 | | 1~ / 16 | | 1~ / 20 | |

